

## HYGROSMART®-IMPER-C-2K-FLEX-E

### Two-Component, Flexible Cementitious Mortar for Waterproofing & Protection.

#### DESCRIPTION

**HYGROSMART®-IMPER-C-2K-FLEX-E (former ELASTIC)** is a two-component waterproofing mortar based on cementitious binders, synthetic & inorganic polymers and high technology additives in water dispersion.

It is a low viscosity mixture with excellent workability, easy application and very strong adhesion: On vertical substrates, one can apply a layer of thickness up to 2 mm in one coat. It also displays outstanding mechanical properties: It remains flexible even when subjected to varied weather conditions and mechanical stresses.

Apply with trowel, brush or roller in two coats of thickness 1.0-2.0 mm each.

#### COMPLIANCE-CERTIFICATION

The product is **CE** certified according to the European Standard **EN 1504-2**.

#### RECOMMENDED FOR

Waterproofing and protection of:

- Wet rooms, roofs & balconies, swimming pools (under tiles)
- Water tanks
- Concrete structures
- Pre-cast panels
- Underground structures
- Retaining walls

#### LIMITATIONS

- Temperature during application limited in the range of 5°C -35°C.
- Max coat thickness of 2 mm.



- Do not add water, cement or any other aggregate,
- Do not apply in swimming pools in non-protected surfaces.

#### FEATURES & BENEFITS

- Completely waterproof.
- Highly resistant to positive and negative pressures.
- Easy to apply.
- Very strong adhesion.
- High weather and UV resistance.
- Good mechanical properties. Its flexibility allows it to bridge effectively cracks up to 1 mm wide.
- Slows down the process of carbonation.
- Product exceeds requirements of **EN 1504-2** standard.

#### APPLICATION PROCEDURE

Clean the substrate using a high-pressure washer, if possible. Remove oil, grease and wax contaminants. Cement laitance, loose particles, mould release agents, cured membranes must also be removed. Surface irregularities or cracks should also be filled with **EPOXY RESIN-21-T** or **HYGROSMART®-BUILDING-F**.

#### Priming:

Simply dampen the substrate with water.

#### Mixing:

The resin component is added gradually to the mortar and mixed mechanically at 400 rpm until you reach a smooth and homogeneous mix.

## HYGROSMART®-IMPER-C-2K-FLEX-E

### Application:

Apply with trowel, brush or roller in minimum two coats of thickness 1.0-2.0 mm each. If during application the mix thickens, do not add water. You may instead, dampen the substrate further. The second coat is applied approximately 4-5 hours after the first. Pot life is approximately **1 hour**. The final surface should not get wet for 7 days.

### CONSUMPTION

Minimum consumption: 1,5 kg/m<sup>2</sup> per 1mm thickness. Coat thickness of 1.0-2.0mm.

### PACKAGING

Mortar: 25 kg.

Resin: 10 kg.

**Colour:** Grey.

### SHELF LIFE

Can be kept for 12 months minimum in the original unopened bags in dry places and at temperatures of 5-25 °C.

### SAFETY INFORMATION

Contains cement: May cause skin irritation due to alkaline reaction. Use protective gloves and goggles. The MSDS (Material Safety Data Sheet) is available on request.

### TECHNICAL SPECIFICATIONS


PROPERTY	UNITS	SPECIFICATION
Density component A	kg/l	1,45
Density component B	kg/l	1,02
Density of mix A+B	kg/l	1,3
Adhesion	N/mm <sup>2</sup>	> 2,0

# HYGROSMART®-IMPER-C-2K-FLEX-E

<b>CE</b>
21
<b>ALCHIMICA S.A.</b> 7 Lampsakou, Athens - GREECE
2085-CPR-082
EN 1504-02:2004 2085 HYGROSMART IMPER-C-2K-FLEX-E Concrete surface protection systems - Coating www.alchimica.com

Essential characteristics	Performance	Harmonized technical specification
CO <sub>2</sub> permeability	152 m	EN 1504-2:2004
Water vapor permeability	2,9 m	
Capillary absorption & permeability to water	0,02 kg/m <sup>2</sup> .h <sup>0,5</sup>	
Adhesion strength by pull-off test	2,3 N/mm <sup>2</sup>	
Reaction to fire	Euroclass F	

NONE OF OUR PUBLISHED INSTRUCTIONS AND SPECIFICATIONS, IN WRITING OR OTHERWISE, ARE BINDING EITHER IN GENERAL OR WITH RESPECT TO ANY THIRD PARTY RIGHTS, OR DO THEY RELIEVE INTERESTED PARTIES OF THEIR DUTY TO SUBJECT THE PRODUCT TO AN ADEQUATE EXAMINATION OF ITS SUITABILITY. IN NO EVENT WILL ALCHIMICA S.A. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE, WHATSOEVER, RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS. ALCHIMICA S.A. RESERVES THE RIGHT TO CHANGE AT ANY TIME THE PROPERTIES OF ITS PRODUCTS. PLEASE REFER TO THE CURRENT VERSION OF THE TECHNICAL DATA SHEET, AVAILABLE FROM OUR WEB SITE [WWW.ALCHIMICA.COM](http://WWW.ALCHIMICA.COM)

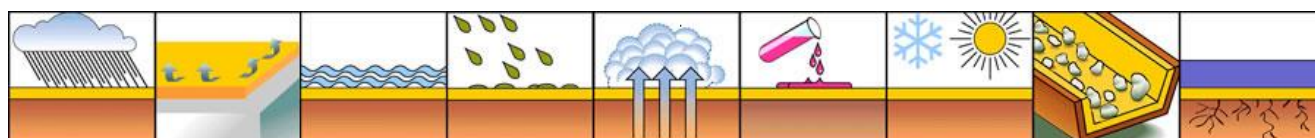

Certified quality, environmental and occupational health & safety management systems:  
ISO 9001/14001 & ISO 45001.